


Thermowell screw-in type per DIN 43772

form 5, welded, female thread

Type series HA8010

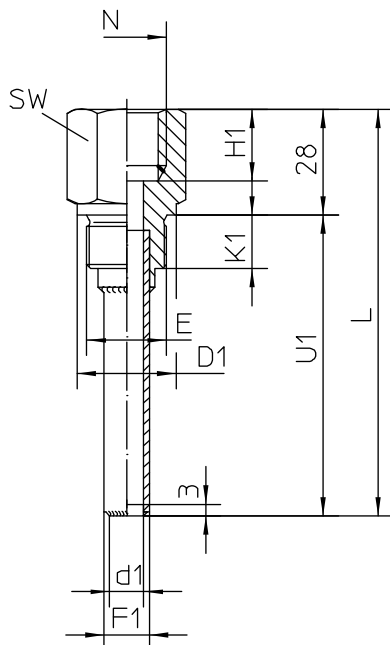

Materials

	material-no.	T max.	P max.*
stainless steel	1.4571	550°C	25 bar

* static conditions of use

Other materials upon request.

The thermowells are available with material certificate per EN 10204-3.1 and are suitable for connection to Zone 0 according to the technical instruction TA_033.

Upon request a calculation for thermowells can be made (for static or dynamic application) with certificate.

Length L1 of the temperature detecting element (dial indicating thermometers)

screwed plug, rotating, internal gasket $L1 = U1 - A$

screwed plug, fixed, external gasket $L1 = U1 + B$

DIN-lengths of the thermowells

(pls specify deviating lengths)

L mm	U1 mm
110	82
170	142
260	232
410	382

– Roughness height rating with inspection certificate per EN 10204-3.1

The surface roughness of the wetted parts made of stainless steel are executed per EHEDG Doc.8 and ASME BPE SF3.

In case of choosing the additional feature HY, we guarantee the following surface roughness values:

Wetted parts	SF3	SF1
Laser welds	$Ra \leq 0.76 \mu m$	$Ra \leq 0.76 \mu m$
Turned parts	$Ra \leq 0.76 \mu m$	$Ra \leq 0.51 \mu m$

Option:

Electropolishing of the wetted parts

Order details

Thermowell screw-in type per DIN 43772, form 5, welded, female thread, Type series HA8010

HA8010	Screw-in thermowell per DIN 43772 for thermometers with female thread										
		Screw in thread E	Instru- ment screw threads N	bore hole Ø d1	pipe Ø F1	D1	K1	H1	SW	B	A
A10	thermowell form 5	G 1/2 B	G 1/2	7	9	26	14	19	27	18	2
A11				7	12						
A13 *				9	14						
A14				11	14						
A20		G 3/4 B	G 1/2	7	12	32	16	19	32	18	2
A21				9	14						
A30		G 3/4 B	G 3/4	7	12	32	16	22	32	18	2
A31				9	14						
A32				11	14						
A33				13	16						
A34				14	18						
A99			pls specify								
G10	material	stainless steel 1.4571 (standard)									
G99		pls specify									

additional features (to be indicated in case of need, only)

W1220	combined pressure and strength test (pls specify test pressure)
W1020	material certificate per EN 10204-3.1
W2502	suitable for connection to Zone 0 acc. to TA_033

Order code (example): HA8010 - A11 - G10 - W1220 - U1=...

(length L and U pls specify in mm; min. 80, max. 2000 mm, support long thermowells to avoid stresses due to vibrations)

* delivered ex stock (with material certificate, too)

	thermowell	screw in thread E	Instrument screw threads N	Bore hole Ø d1	pipe Ø F1
HA8010 - A13 - G10 - U1=82	form 5	G 1/2 B	G 1/2	9	14
HA8010 - A13 - G10 - U1=142	form 5	G 1/2 B	G 1/2	9	14